


Operating Instruction

Liquid-Ring Vacuum Pumps

Types ZB

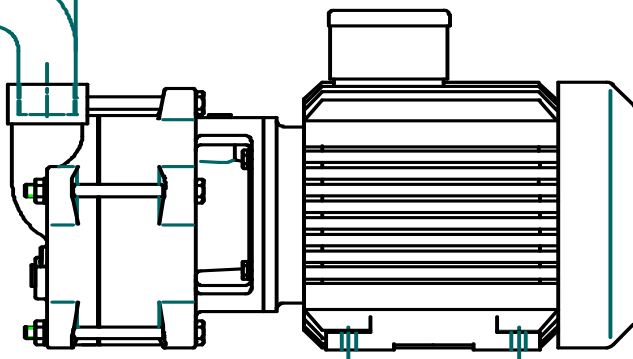

Please keep your Operating Instruction in a safe place!
Translation of the original operating instructions!

Type

Serial No.



EDUR-Pumpenfabrik
Eduard Redlien GmbH & Co. KG

Postfach 1949 · D-24018 Kiel
Tel. (+431) 689868 · Fax (+431) 6898800
E-mail: info@edur.de · <http://www.edur.com>

Contents

1	General information	3	6	Service/Maintenance	10
1.1	Design	3	6.1	Supervision of Operation	10
1.2	Intended Use	3	6.1.1	Shaft Bearing	10
1.3	Place of Operation	3	6.1.2	Mechanical Seal	10
			6.2	Maintenance	10
2	Security	4	6.2.1	Preparation	10
2.1	Identification of Safety Instructions in the Operating Manual	4	6.2.2	Dismounting	11
2.2	Qualification and Training of Operating Personnel	4	6.2.2.1	Pumpe	11
2.3	Dangers in the event of non-compliance with safety instructions	4	6.2.2.2	Dismounting of Mechanical Seal	11
2.4	Compliance with Regulations Pertaining to Safety at Work	5	6.2.2.3	Motor	11
2.5	Safety instructions for the user/operator	5	6.2.3	Mounting	11
2.6	Safety instructions for maintenance, inspection and mounting work	5	6.2.3.1	General Remarks	11
2.7	Unauthorized conversion and production of replacement parts	5	6.2.3.2	Mounting of Mechanical Seal	11
2.8	Impermissible modes of operation	5	7	Disturbance	13
3	Transport and Intermediate Storage	6	8	Pump View and List of Spare Parts	14
3.1	Transport	6	8.1	ZB	14
3.2	Intermediate Storage	6			
3.2.1	Internal Preservation	6			
3.2.2	Preservation Control	6			
3.2.3	Removal of Preservation	6			
4	Mounting	6			
4.1	Installation	6			
4.1.1	Fresh Water Operation	6			
4.1.2	Separator with partial Backflow of Coolant	7			
4.2	Connected Loads	7			
4.3	Direction	8			
4.4	Coupling Protection / Protective equipment	8			
4.5	Piping	8			
4.5.1	General Remarks	8			
4.5.2	Suction Pipeline	9			
4.5.3	Pressure Pipeline	9			
4.5.4	Additional Connections	9			
5	Starting Operation/ Stopping Operation	9			
5.1	Preparations for Initial Operation	9			
5.2	Initial Starting	9			
5.3	Restarting	9			
5.4	Stopping Operation	9			

Translation

When shipping to EEA Countries, the operating instructions are to be translated into the respective language of the country where the device is to be used. In the event that discrepancies arise in the translated text, the original operating instructions (German) are to be consulted or the manufacturer is to be contacted in order to clarify the discrepancy.

Copyright

The forwarding and reproduction of this document, the use and disclosure of the contents of this document is forbidden unless explicitly permitted. Failure to comply with this will result in liability for damages.

All rights reserved.

1 General information

The most important operating data can be found on the identification plate. **It must be ensured that the pump type and all technical data correspond to the system / machine project data.** It must be observed that the electric motor is provided with its own identification plate complete with additional technical data. The motor data must also correspond with the system / machine project data.

The separately enclosed operating instructions are also to be observed when dealing with pumps in accordance with EC Directive 94/9/EC (ATEX). These instructions contain additional instructions and requirements with regards to the correct and proper use of pumps in potentially explosive areas.

The pumps may not be commissioned until the following points have been observed / ensured:

- Inappropriate physical and mental strain placed upon the operation staff must be reduced to an absolute minimum level by taking ergonomic principles into account.
- A safe working environment must be guaranteed. Controls are to be designed and constructed in such a manner that no hazardous situations can occur. Furthermore, such situations may not occur even in the event of faults / breakdown of the control. In particular, the pump may not be unintentionally started. It must also be the case that the supply / discharge lines to and from the pump can also be closed.
- It must be guaranteed that the pump can be safely stopped. Irrespective of the type of operation, the EMERGENCY STOP function must be available and ready for operation at all times. In doing so, it must be taken into consideration that equipment connected to the pump can also be stopped in the event that a hazard can occur if such equipment continues to be operated.
- The supply / discharge lines must be able to withstand the possible internal and external pressure loads
- By implementing suitable precautions, it must be ensured that no injuries can occur by touching the pumps, e.g. with regards to extreme temperatures.

- When conveying materials that pose a hazard to health / environment, it must be ensured that these materials can also be collected and taken away safely. Any risk with regards to inhalation, ingestion as well as contact with the eyes, skin and mucus membranes must be prevented.

1.1 Design

Single-stage liquid ring vacuum unit-construction pump, available in different construction materials, with or without an electric drive unit. Shaft sealed by different mechanical seals.

1.2 Intended Use

Power adjustment

The power of the motors is to be reduced in accordance with the guidelines provided by the motor supplier in the event that the motors are positioned in ambient temperatures of above 40°C or in a location that is more than 1000m above sea-level.



The conveying of liquids that may chemically corrode the pump material or that contain abrasive components will destroy the pumps. The conveyed material must be suitable for use with the pump material.

The power consumption of the pump proportionally changes based upon the density of the conveyed material. The densities must correspond to the order data in order to avoid excess strain being placed upon the pump and motor.

1.3 Place of Operation

The pump unit must be freely accessible for the purpose of supervision, servicing, maintenance, mounting and dismounting.

Avoid using it in corrosive and very dusty surroundings.

The limiting values of the electric drive unit with regard to the insulation material class and the types of protection must be observed.

For other drive units supplied, see the enclosed separate operating instructions.

The minimum suction pressure depends on the temperature and the type of the coolant used.

The pressure must not fall below the value specified in Fig. 3.2a.Type	Suction pressure
ZB 24U0-66	100 mbar

Fig. 3.2a Minimum permissible suction pressure

These specifications are independent of the relative air humidity and refer to a coolant temperature of 15°C. Higher temperatures reduce the suction ability. The maximum temperature of the air intake must not exceed 100°C. The coolant temperature may be max. 80°C.

CAUTION Continued operation below the specified suction pressures may lead to the pump being damaged.

For vacuum operation, a maximum outlet pressure of 1100 mbar is permitted if the coolant flow according to Fig. 3.2b is observed.

Suction pressure [mbar]	Coolant flow [m ³ /h] ZB 24
100	0,27
200	0,20
300	0,15
400	0,11
500	0,07
600	0,05

Applies to dry air suction $t=20^{\circ}\text{C}$ and coolant temperature of 15°C with water as the coolant.

Fig. 3.2b Coolant flow

For compressor operation, the maximum differential pressure may be 1 bar. The coolant flow specified in Fig. 3.2b must be observed. The air and steam mixture to be evacuated and the coolant must be free of abrasive solids. Flow sustained even if a small amount of suspended matter or liquid inclusions in the air are present. A continuous supply of coolant must be guaranteed to dissipate the heat which develops and to compensate any loss of coolant.

2 Security

These operating instructions contain basic safety instructions for installation, operation and maintenance. It is therefore essential that they are read by fitters and all specialist staff and customer personnel prior to installation and start-up. They must always be kept at hand at the place of installation.

The special safety instructions contained in the other chapters must be observed in addition to the general safety instructions in this chapter.

2.1 Identification of Safety Instructions in the Operating Manual

The safety instructions contained in these operating instructions which represent a danger to personnel if not complied with are specially marked by the general danger symbol:



Warning symbol as per
ISO 3864-B.1.1

Warning of danger from electric voltage is given as follows:



Warning symbol as per
ISO 3864-B.3.6

Instructions which are essential to avoid endangering the machine and its functioning are marked by the word

CAUTION

Instructions affixed directly to the machine such as

- Directional markers
- Signs for fluid connections

must always be observed and maintained in fully legible condition at all times.

2.2 Qualification and Training of Operating Personnel

The operating, maintenance, inspection and mounting personnel must be appropriately qualified for the duties assigned to them. The scope of their responsibilities, competency and supervisory duties must be closely controlled by the customer. If the personnel do not have the required knowledge, they must be trained and instructed. If required, this may be provided by the manufacturer/supplier on behalf of the customer. The customer must additionally ensure that personnel fully understand the content of the operating instructions.

2.3 Dangers in the event of non-compliance with safety instructions

Failure to comply with the safety instructions may result in danger to persons, and place the environment and the machine at risk. Non-compliance with the safety instructions may lead to the loss of any claims for damages.

Non-compliance may relate to the following dangers:

- Failure of important functions of the plant
- Failure of specified methods for maintenance and servicing
- Danger to persons resulting from electrical, mechanical and chemical effects
- Danger to the environment resulting from leakage of hazardous substances



Injuries to hands can occur during maintenance and repair works. Ensure that all safety instructions are observed.

Danger areas on the pump

During maintenance and cleaning work, an area measuring approximately 1 m around the pump will serve as a danger area. This area may also be increased in size in the event of faults. The operating area is only located at the operation elements.

2.4 Compliance with Regulations Pertaining to Safety at Work

The safety instructions contained in these operating instructions, current national accident prevention regulations, as well as internal working, operating and safety rules of the customer, must be observed.

2.5 Safety instructions for the user/operator

- Hot or cold parts representing a danger must be protected against accidental contact on site.
- Protection against accidental contact for moving parts (such as the coupling) must not be removed while the machine is in operation.
- When operating pump aggregates in a dust-laden environment (e.g. milling, chipboard manufacture, bakeries), the surfaces of the pumps and motors must be cleaned at regular intervals, depending on local conditions, in order to maintain the cooling effect and eliminate the possibility of spontaneous combustion.
- Leakage (e.g. from the shaft seal) of hazardous substances being handled, such as explosive, toxic or hot materials, must be discharged such that no danger to persons or the environment is created. Legal regulations must be observed.

- Dangers from electrical energy must be eliminated. For details in this regard, refer to VDE and local power company regulations.

2.6 Safety instructions for maintenance, inspection and mounting work

The operator company shall ensure that all maintenance, inspection and mounting work is performed by authorized and qualified specialist personnel who have thoroughly studied the operating instructions.

Work on the machine is only to be carried out when the machine is at a standstill. The means of shutdown of the machine described in the operating instructions must always be followed.

Pumps or aggregates handling fluids which are detrimental to health must be decontaminated.

Replacement parts that have not been supplied by the manufacturer are not tested and not approved for use. The installation and usage of such replacement parts can have a negative impact upon the pump characteristics.

The manufacturer is not liable for any damages caused by the usage of non-original parts.

On completion of work all safety and protective facilities must be re-installed and made operative again.

The instructions under Section Initial Starting must be observed before restarting.

2.7 Unauthorized conversion and production of replacement parts

Conversion or modification of the machines is only permissible after consultation with the manufacturer. Original replacement parts and accessories approved by the manufacturer serve safety purposes. If other parts are used the manufacturer cannot be held liable for the consequences.

2.8 Impermissible modes of operation

The operating safety of the machine supplied is only ensured when it is used in accordance with our order documentation, especially with the order confirmation. The limit values given on the data sheet must under no circumstances be exceeded.

3 Transport and Intermediate Storage

3.1 Transport

The pump unit must be transported in a level or horizontal manner.

When transporting the complete pump unit by crane, mount the ropes as shown in the figure.

CAUTION The crane facility and the ropes must be of sufficient capacity. The ring loop of the motor must not be used for transport of the complete pump unit.



A pump that is insufficiently secured can lead to persons being seriously injured.

Hoisting equipment and slinging belts are to be sufficiently measured for the entire weight of the pump. If necessary, ensure that the pump is secured during transport with the use of appropriate slinging equipment. The pump is only to be positioned on a surface that is sufficiently solid and is level in all directions.




Fig. 2.1a Pump and Motor

3.2 Intermediate Storage

On delivery, all pumps are preserved. Thus, they can be stored for 6-12 months. If the storage time is longer or the pumps are not in operation, they must receive additional preservation on the inside. The preservation means (please consult us) depends on the used materials and conditions of operation.

The storage room must be roofed and well ventilated. Avoid temperatures below zero and high humidity.

3.2.1 Internal Preservation

Fill the pump with the preserving means and slowly turn the rotor manually. Close the suction branch securely and the pressure branch securely.



A rotating impeller can cut or crush hands and arms. Do not reach into the pressure or suction sockets of the pump housing.

3.2.2 Preservation Control

Check the filling level of the pump and turn the rotor by hand at regular intervals of 3 months. Refill preservation means, if necessary.

3.2.3 Removal of Preservation

Prior to operation, the pump must be rinsed thoroughly. In the case of additional preservation, the preservation means on the inside must at first be removed.

4 Mounting

4.1 Installation

The vacuum pump must be mounted horizontally on a pedestal, with the connecting sleeve facing upwards. The pedestal must be even and must have fasteners and a sufficient load capacity.



Physical injury can occur during the pump installation phase.

Safety regulations and the generally recognised engineering regulations are to be observed.

The operator is to ensure a direct and barrier-free access to the pump and must also guarantee good visibility conditions. The operator is to protect the pump against environmental impacts (wind, rain, frost, sand, etc.).

4.1.1 Fresh Water Operation

Fresh water operation will be preferred, on condition that sufficient fresh water can be provided as coolant.

The supplied fresh water and air are completely removed on the delivery side and replaced by new fresh water.

Fresh water is taken directly from the normal water pipeline (Fig. 4.1.1a) or from a pre-settling tank with a float valve (Fig. 4.1.1b).

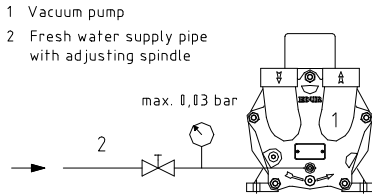


Fig. 4.1.1a Fresh water supply from the water pipeline

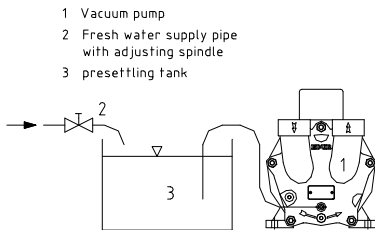


Fig. 4.1.1b Fresh water supply with presettling tank

When the fresh water is taken directly from the water pipeline, observe the values specified in Fig. 3.2b strictly. A flow meter is used to determine the fresh water flow. It is also possible to determine the penetrating liquid flow by measuring the penetrating liquid for a certain period of time. The pressure of the supply pipe must never exceed 0.03 bar.

CAUTION A considerable deviation from the specified values leads to the pump unit being damaged.

If a presettling tank is used, the fresh water is automatically primed in by the pump after it is initially filled. During operation, the water level of the tank should be above the centre line of the pump.

4.1.2 Separator with partial Backflow of Coolant

This operating mode is used if there is not sufficient fresh water available as the coolant or if other liquids are used as coolants. (Fig. 4.1.2a). The coolant is taken from the separator and lead back to the pump.

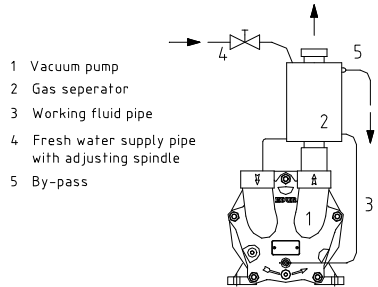


Fig. 4.1.2a Separator with partial backflow of the coolant

The loss of coolant must be permanently compensated during continuous operation. If the pump heats up considerably, a cooler with a small flow resistance must be installed between the separator and the pump or sufficient coolant must be supplied which compensates for the loss of coolant. The steam pressure must never exceed the temperature of the coolant.

It is also possible to reduce the period of operation. In this case, a separate cooling system or the constant supply of coolant can be avoided. However, extra coolant must be added at pre-defined intervals. The steam pressure temperature of the coolant used indicates the limit of use.

The liquid level of the separator should be above the centre line of the pump.

4.2 Connected Loads



Work must only be executed when electricity is switched off. Make sure that the system cannot be powered on accidentally.

CAUTION An overload protection system (e.g. motor protection switch, etc.) must be in place in order to protect the pump and the motor.

The separately enclosed motor safety guidelines and instructions are to be observed.

When using motors that are equipped with frequency converters (FC), the safety guidelines and instructions contained in the separately enclosed FC operating instructions are to be observed. An appropriate risk analysis is to be carried out by the system operator due to the fact faults and malfunctions of the frequency converter cannot be completely prevented as a result of electromagnetic radiation.

Prior to connecting the pump to the power system, fill it with pumped liquid. The pump must by no means be operated without liquid!

The pump must be connected according to international national requirements as well as according to the requirements of the local mains system. Voltage and frequency must correspond to the winding of the electric drive. For details of the respective winding, see the type label.

The motor must not be operated without motor protection facility.

For motors with explosion protection, the range of temperature of the motor indicated on the type label must correspond to the range of the fuel gas.



Overheating damages the three-phase alternating current motor. Ensure that a sufficient supply of cool air is in place during operation.



Electrical power can lead to death. Ensure that a potential equalisation connection is in place between the pump housing and the building earthing.



Incorrect electrical switching modes will lead to the breakdown of the three-phase alternating current motor. Observe the switching mode.

4.3 Direction

Switch on the motor briefly in order to check the direction of rotation. The motor must not reach its operational speed. The direction of rotation must correspond to the arrow indicating the direction of rotation on top of the pump. If the direction of rotation is not correct, perform the relevant modifications at the phase-sequence

CAUTION

The switching on / operation of opened pumps (outside of the pipe line network) is forbidden.



A rotating impeller can cut or crush hands and arms. Do not reach into the pressure or suction sockets of the pump housing. Secure the pump appropriately when carrying out a rotational direction check.



The dry operation of the pump destroys / damages the mechanical seal and leads to leakage and the discharge of the conveyed material.

Ensure that the pump is switched off again immediately after the warm-up phase.



The incorrect rotational direction of the pump destroys / damages the mechanical seal and leads to leakage and the discharge of the conveyed material.

4.4 Coupling Protection / Protective equipment



The pump must not be operated if coupling protection is not fitted. If this coupling protection is not supplied by the manufacturer, the operator of the pump must supply it himself.

CAUTION

In the event that hot or cold pump parts lead to hazards, appropriate protective measures (contact protection) are to be installed on-site. Operation without affixed protective equipment is forbidden.

4.5 Piping

4.5.1 General Remarks

Pressure lines are to be laid in accordance with the respectively valid guidelines as well as the relevant accident prevention regulations. Pipe lines and pumps are to be secured against tripping. If required, a safety area is to be provided against tripping.

The flange covers located on the suction and pressure sockets on the pump are to be removed before installing into the pipe line. The containers, pipe lines and connections must be thoroughly cleaned and rinsed before commissioning. It is often the case that welding beads, scale and further contaminants only disengage after some time. These contaminants are to be kept away from the pump by implementing appropriate measures, e.g. using a filter in the suction line.

CAUTION

Observe the conveying and connection direction (suction / pressure flange) of the pump. An incorrect conveying direction of the pump can lead to system faults.

The nominal widths of the pipes must be at least as wide as those of the pump connection joints.

Avoid sudden changes of diameter. The pipes must be gathered and secured right in front of the pump so that their weight does not affect the pump. Measuring equipment for supervision of the pump operation is required.

Prior to operation, all parts in contact with liquids must be thoroughly cleaned.

CAUTION Under no circumstances may the pump be used as a fixed point for the pipe line. No loads or torques arising from the pipe line system, e.g. as a result of twisting, heat expansion, etc. may have an impact on the pump.



Hot and discharged conveyed materials pose a risk to life. Do not exceed the permitted pipe line forces.

4.5.2 Suction Pipeline

The suction pipeline must be as short as possible. Integrated fittings must be vacuum-tight. To avoid a backflow of air and coolant if operation is interrupted, a backflow valve must be provided inside the suction pipe which has a resistance as low as possible. The installation of a vacuum limiter is recommended to prevent the suction pressure from becoming too low.

4.5.3 Pressure Pipeline

The pressure specified in section 3.2 must not be exceeded. The installation of a stop valve is not compulsory.

4.5.4 Additional Connections

The position and dimensions for required additional connections, such as manometer connections and the process water connection are to be taken from the pump tags or from the sectional drawings in the Operating Instructions.

5 Starting Operation/ Stopping Operation

5.1 Preparations for Initial Operation

Prior to starting up, any existing stop slide within the pressure pipeline must be completely opened. The pump must be drained of air and be completely filled with coolant.

Moreover, the liquid level in the pre-settling tank or the separator must be checked and corrected, if necessary.

If there is a stop slide within the pressure pipeline, make sure that the pump cannot be started and can be stopped.

CAUTION A pump / pipe line that is not aerated leads to the destruction / damage of the mechanical seal. Conveyed material may be discharged.

Before commissioning, it must be ensured that the pump and pipe lines have been connected / assembled in accordance with the guidelines and in a fixed manner. The pump may only be operated provided that protective equipment (coupling protection / fan guard) is in place. The pump must be operated with contact protection when dealing with hot conveyed material.

CAUTION Do not block the motor fan with foreign articles. Blockage will lead to the ejection of foreign articles and overheating / breakdown of the motor.

5.2 Initial Starting

The pump must not be started until the stop valve of the coolant pipeline is closed so as to avoid overloading of the motor. If a pre-settling tank or a separator is used, it is not necessary to close the coolant pipeline. If a stop valve is installed in the suction pipeline, the stop valve in the suction pipeline must be completely opened after starting up and the coolant flow must be adjusted according to the operating mode.

5.3 Restarting

Do not restart the pump until the pump shaft stands still.

CAUTION Backflow of liquid must not result in a change of direction of rotation of the pump. If this is the case, mechanical seals dependent on direction of rotation may be damaged.

CAUTION Before re-starting the pump, it must be ensured that the pump has not incurred any damage during the downtime and that all safety and protective equipment is affixed.

5.4 Stopping Operation

Depending on the operating mode in question, the stop valve in the coolant pipeline must be closed at first. Close any existing stop valve in the suction pipeline. Switch off the motor and ensure that the motor comes to a quiet stop. After standstill of slide, close any fitted stop valve in the pressure pipeline.

If the pumped liquid reaches temperatures below zero and/or if longer periods of standstill occur, the pump must be drained completely and be preserved (see section 2.2.1).

6 Service/Maintenance

6.1 Supervision of Operation

CAUTION The pump is to be secured against being unintentionally switched on during maintenance and cleaning work. Work may only be carried out provided that the system / pump is in a pressure-free condition.

Maintenance and cleaning work may only be carried out by expert staff members. The expert staff members must be provided with personal protective equipment.

Ensure that the pump is cleaned and maintained at regular intervals in order to be able to ensure a trouble-free operation.

CAUTION Conveyed material that poses a hazard to health can place a person's health at risk. The operator is to equip the system with collection equipment or other appropriate protective measures. Personal protective equipment such as gloves and protective goggles must always be worn.

Ensure that the pump runs free of vibration and smoothly. Ensure that the pump runs in a quiet and vibration-free manner. Inspect the pump for loose connections at regular intervals (an interval of 4 months is recommended). Regularly remove deposits of dust as well as contaminations.



Physical injury can occur when carrying out maintenance and cleaning work on the pump.

Safety regulations and the generally recognised engineering regulations are to be observed.

The pump must by no means be operated without liquid.

There is only a minimal or invisible loss of leakage (steam) if the mechanical seals function correctly. Do not operate the pump for a longer period with a closed stop valve.

The maximum permitted environmental temperature at the motor or pump casing may exceed the environmental temperature by 50°C. It must not exceed 90°C. Only operate the pump at a higher temperature with the manufacturer's approval.

Installed pumps must be powered on and off briefly once a week in order to guarantee that they are ready for operation.



Insufficient rotary motion of the motor shaft will lead to the impeller becoming stuck and the mechanical seal breaking down. This can lead the discharge of the conveyed material.

6.1.1 Shaft Bearing

Under normal operation conditions, replace the motor bearings after 20.000 hours of operation or at the latest after 2,5 years. In the case of bad operation conditions, as e.g. a high environmental temperature or a corrosive and dusty environment, the motor bearings must be checked at an earlier date and, if necessary, be replaced.

6.1.2 Mechanical Seal

The mechanical seals are maintenance-free. If leakages occur after a longer period of operation, replace the complete seal.

CAUTION When dealing with conveyed materials that pose a hazard to health and to the environment, the operator is to equip the system with collection equipment or other appropriate protective measures. Personal protective equipment such as gloves and protective goggles must always be worn.

6.2 Maintenance

6.2.1 Preparation



In order to make sure that the pump cannot be started, separate the power cable from the motor. Secure the unit against accidental switch-on.

The stop valves located in the pressure and suction line are to be closed and secured against unauthorised opening. Close the stop valve of the pressure and suction pipelines. The pump casing must have reached the environmental temperature and be drained of liquid and pressure.



Leaking conveyed material can injure hands and arms. Ensure that the pump housing is in a pressure-free condition. Only then may the pump be emptied.



When dealing with pumps that have been used to convey materials that pose a hazard to health / to the environment, ensure that no danger to persons and the environment can occur when emptying the pump. Wear appropriate protective clothing and, if required, protective mask.

The rinsing liquid used and the remaining liquid located in the pump must be professionally collected and disposed of without posing any hazards to persons or to the environment.

6.2.2 Dismounting

By no means use force while dismounting the pump.



Pumps that are used to convey material that is hazardous to health and to the environment must be decontaminated. When releasing the material, ensure that no danger to persons and the environment can occur when emptying the pump. Legal requirements are to be observed and adhered to.



The pump must always be secured against tipping over. There is a risk of tipping over when loosening the pump from the outside of the pipe line network. Persons can be seriously injured if the pump tips over.

During the transport phase, ensure that the pump is secured using appropriate slinging equipment. The pump is only to be positioned on a surface that is sufficiently solid and is level in all directions.

CAUTION

The pump may only be dismantled when in a pressure-free, empty, de-contaminated (if required) and secured condition. Protective clothing and protective mask must be worn if required.

It is possible that the casing cover (161) remains in the pipe system. For this the nuts (920) have to be screwd and the motor with the other pumps part has to be pulled off from casing cover.

For motors with a base the mounting screws must also be loosened.

For fixed impeller use appropriate dismounting facilities.

6.2.2.1 Pumpe

Continue dismounting the pump as described in the drawings on pages 11.

Mark the position and sequence of the pump parts for later mounting.

6.2.2.2 Dismounting of Mechanical Seal

When replacing the mechanical seal, the entire pump or part of it must be dismounted.

After removal of the impeller (230) and of the circlip (932), the complete mechanical seal is to be removed from the shaft with its casing (100).

6.2.2.3 Motor

To dismount the motor, the pump must be completely dismounted.

6.2.3 Mounting

6.2.3.1 General Remarks

Prior to mounting, all parts must be cleaned thoroughly. Remove remaining parts of the seals. Slight scratches and grooves on the shaft near the shaft seal and on other sealing surfaces of the casings are to be polished with linen. If this is not possible, replace the parts.

Mounting is effected in the reverse order of dismounting. The sealing surfaces of the casings are to be covered with a sealing compound which is compatible with the coolant and air.

The starting torques for the tie bolts and locking screws non lubricated condition are displayed in fig. 6.2.3.1a.

Thread	M 10
torque Nm	50

Abb. 6.2.3.1a Starting torque

6.2.3.2 Mounting of Mechanical Seal

CAUTION

When mounting the mechanical seals, you must proceed very carefully and with precision.

Do not touch the surfaces of the seal. Do not damage the sealing parts. To facilitate the mounting, moisten elastomer with low-surface tension water.



Mechanical seals and sealingparts with elastomer made of EP rubber must by no means come in contact with oil or grease.

The shape of spare mechanical seals may differ from those of the installed mechanical seal. However, the dimensions of the spare mechanical seal are the same and for that reason it can be replaced.

To avoid distortion of the counter-ring, mechanical seals with double PTFE-wrapped sealing rings are additionally secured by a leading pin inside the casing. The pin must be removed when replacing the type of mechanical seals and when using a type with different O ring material.

For details of the individual types of mechanical seals observe the following procedures.

CAUTION

Observe the enclosed, separate mounting instructions for those types of mechanical seals which are not listed.

1. Stressed mechanical seal independent of direction of rotation with elastomer bellows (fig. 6.2.3.4a)




Fig. 6.2.3.3a

Carefully press angle collar (1) or o-ring (1b) together with counter ring (2) into the counter ring fit. Twist the rotating unit (3,4,5) onto the shaft as far as the counter ring. Put on supporting ring and mount circlip (932.1).

2. Stressed mechanical seal dependent on direction of rotation with conical springs (fig. 6.2.3.3b)




Fig. 6.2.3.3b

Place the O-ring (1) in the counter ring seat and carefully insert the counter ring (2). Press the rotating unit (3, 4, 5, 6, 7, 8) on to the shaft whilst rotating.

- a) Attach the impeller (230)* or
- b) Assemble the safety ring (932)* / push the slide ring sleeve (516)* onto the shaft.

7 Disturbance

	Pump is blocked	Coupling fault	Suction pressure insufficient	Suction pressure too high	Storage temperature too high	Pump operates badly	Leakages at the casings	Overload of the drive	Shaft seal leaks badly	Motor protection activated	Pump is becoming too hot		
			•										CAUTION To eliminate disturbance, the pump must have reached the environmental temperature and must be drained of air and pressure.
			•										The chart shows a list of potential errors and their possible causes. For errors which are not listed here or which have other reasons, please consult us.
			•										Cause
			•										Elimination
													Coolant flow too high or too hot
													Check coolant flow, reduce or cool necessary
													Leakages of piping
													Seal piping
													Direction of rotation incorrect
													Check and change phase sequence, if necessary
													Speed too low
													Increase speed ¹⁾
													Speed too high
													Reduce speed ¹⁾
													• Coolant flow too low
													Increase coolant flow
													• Wear of inner parts
													Replace inner parts
													• Coolant flow too high
													Reduce coolant flow
													• Shaft seal damaged
													Replace shaft seal
													• Counter pressure too high
													Reduce counter pressure
													• Connecting screws, seals
													Tighten connecting screws, replace seals
													• Entrained liquid too high
													Reduced entrained liquid
													• Problems via piping
													Check pipe connections/pump fasteners/bearing distance of pipe clips
													• Defective bearing
													Replace bearing
													• Motor protection unit set incorrectly or defective
													Check motor protection unit, replace it, if necessary
													• Impeller blocked
													Clean interior parts from particles and impurities
													• Inlet blocked
													Open stop slide in the suction pipeline

¹⁾ Please consult us

EG Declaration of Conformity
In accordance with EC Machinery Directive 2006/42 EC, Appendix II, 1 A

We, EDUR Pumpenfabrik Eduard Redlien GmbH & Co. KG
Hamburger Chaussee 148-152
D-24113 Kiel

hereby declare that the compact design rotary pump – see cover sheet for information regarding pump model, conforms to all of the relevant regulations of EC Machinery Directive 2006/42/EC. The protection objectives of the low voltage directive were observed in accordance with Appendix I, No. 1.5.1 of the machinery directive. The following harmonised standards applied:

DIN EN 12100-1 DIN EN 809
DIN EN 12100-2 DIN EN 14121

Person responsible for the documentation: A. Weiss

Declaration of Incorporation
In accordance with EC Machinery Directive 2006/42/EC, Appendix II, 1 B

We, EDUR Pumpenfabrik Eduard Redlien GmbH & Co. KG
Hamburger Chaussee 148-152
D-24113 Kiel

hereby declare that the incomplete compact design rotary pump – see cover sheet for information regarding pump model – supplied without motor conforms to the following essential requirements of EC Machinery Directive 2006/42/EC, Appendix I: 1.1.1.; 1.1.2.; 1.1.3.; 1.1.5.

The following harmonised standards applied:

DIN EN 12100-1 DIN EN 809
DIN EN 12100-2 DIN EN 14121

This incomplete machine may only be put into operation after it has been determined that the machine into which this incomplete machine is to be installed, conforms to the regulations of the machinery directive.

Person responsible for the documentation: A. Weiss

